

**6AF4****6AF4****UHF OSCILLATOR TRIODE**

MINIATURE TYPE


**GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage . . . . . 6.3 . . . . . ac or dc volts  
Current . . . . . 0.225 . . . . . amp

Resonant Frequency (Approx.) . . . . . 1000 Mc

Direct Interelectrode Capacitances (No external shield):

Grid to Plate . . . . . 1.9  $\mu\mu\text{f}$   
Grid to Cathode and Heater . . . . . 2.2  $\mu\mu\text{f}$   
Plate to Cathode and Heater . . . . . 0.45  $\mu\mu\text{f}$ **Characteristics - Class A<sub>1</sub> Amplifier:**Plate Voltage . . . . . 80 100 volts  
Cathode-Bias Resistor . . . . . 150 150 ohms  
Amplification Factor . . . . . 15 16  
Plate Resistance . . . . . 2270 2130 ohms  
Transconductance . . . . . 6600 7500  $\mu\text{mhos}$   
Plate Current . . . . . 16 20 ma**Mechanical:**Mounting Position . . . . . Any  
Maximum Overall Length . . . . . 2-1/8"  
Maximum Seated Length . . . . . 1-7/8"  
Length, Base Seat to Bulb Top (Excluding tip) . 1-1/2"  $\pm$  3/32"  
Maximum Diameter . . . . . 3/4"  
Bulb . . . . . T-5-1/2  
Base . . . . . Small-Button Miniature 7-Pin (JETEC No. E7-1)  
Basing Designation for BOTTOM VIEW . . . . . 7DKPin 1 - Plate  
Pin 2 - Grid  
Pin 3 - Heater  
Pin 4 - Heater  
Pin 5 - Cathode  
Pin 6 - Grid  
Pin 7 - Plate**OSCILLATOR IN UHF TELEVISION RECEIVERS****Maximum Ratings, Design-Center Values:**DC PLATE VOLTAGE . . . . . 150 max. volts  
DC GRID VOLTAGE . . . . . -50 max. volts  
DC GRID CURRENT . . . . . 8 max. ma  
PLATE INPUT . . . . . 2.5 max. watts  
PLATE DISSIPATION . . . . . 2.25 max. watts  
DC CATHODE CURRENT . . . . . 28 max. ma  
PEAK HEATER-CATHODE VOLTAGE:  $\blacklozenge$   
Heater negative with respect to cathode . 80 max. volts  
Heater positive with respect to cathode . 80 max. volts $\blacklozenge$ : See next page.

JULY 1, 1952

TUBE DEPARTMENT

TENTATIVE DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6AF4



6AF4

## UHF OSCILLATOR TRIODE

## Typical Operation as Oscillator at 950 Mc:

DC Plate Voltage . . . . .	100	volts
DC Grid Voltage . . . . .	-4	volts
<i>From a grid resistor of . . . . .</i>	10000	ohms
DC Plate Current . . . . .	22	ma
DC Grid Current (Approx.) . . . . .	400	$\mu$ amp
Useful Power Output . . . . .	160	milliwatts

## Maximum Circuit Values:

## Grid-Circuit Resistance:

For fixed-bias operation . . . . .	Not recommended
For cathode-bias operation . . . . .	0.5 max. megohm

- ♦ It is recommended that the heater be kept at cathode potential to minimize the effects of variation in the heater-to-cathode capacitance between tubes.

## OPERATING CONSIDERATIONS

The mounting arrangement should insure that the tube is held secure by its socket. Unless this recommendation is followed, the generated frequency may change by as much as 10 megacycles per second. Use of a conventional miniature tube shield and external clamping arrangement are recommended.

The base pins of the 6AF4 fit the miniature 7-contact socket. The socket should be of the mica-filled, rubber, or ceramic type.




6AF4

6AF4

### AVERAGE PLATE CHARACTERISTICS

$E_f = 6.3$  VOLTS

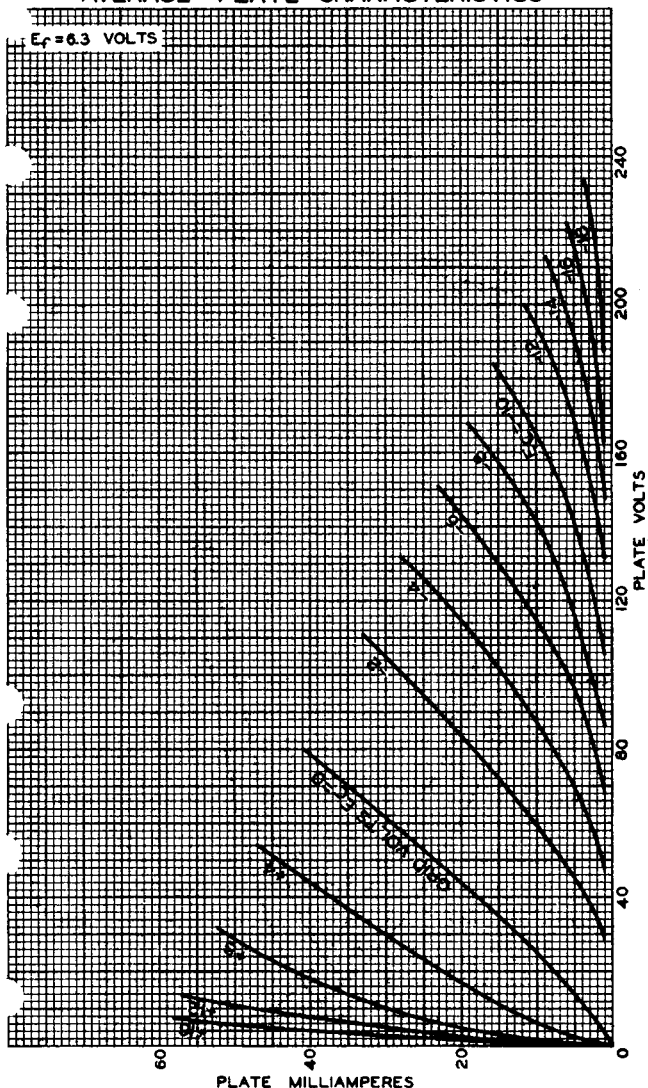

FEB. 20, 1952


TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7756

6AF4


  
6AF4

## AVERAGE CHARACTERISTICS

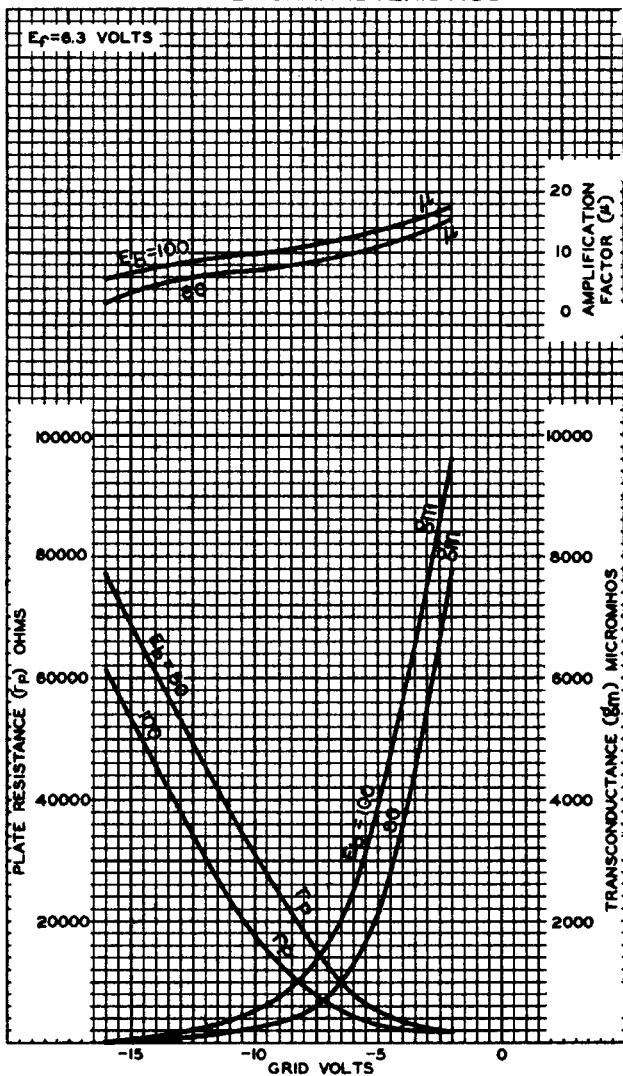

FEB. 26, 1952

 TUBE DEPARTMENT  
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-7756



6AF4

6AF4

### AVERAGE CHARACTERISTICS

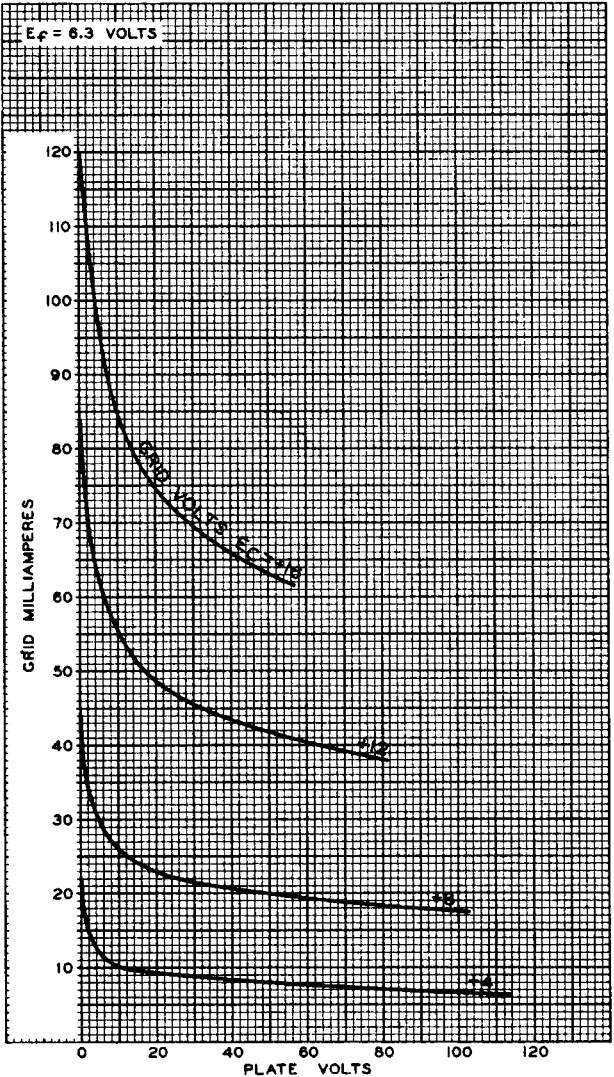


6AF4



6AF4

# FREQUENCY SHIFT CHARACTERISTICS

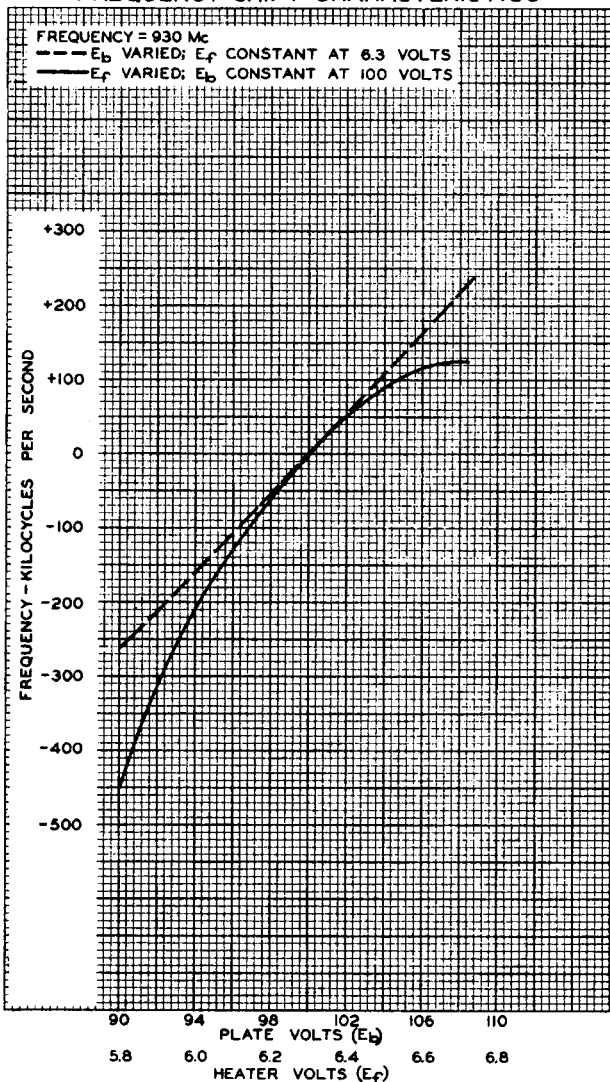

FEB. 29, 1952

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7762