

**AN/UGC-144
Communications Terminal**

NSN: 5815-01-262-4611

Reference: TM-11-7025-267-12

General Information

The AN/UGC-144 provides single subscriber operation. When in a network, the unit has a full-duplex asynchronous communications capability. It operates at signaling speeds of 45.5 to 32,000 b/s at ASCII data transfer rates. The single subscriber terminal (SST) can compose, edit, display, refile, store, transmit, and receive messages. It can monitor narrative message traffic in the R, U, and Y communities and can provide terminal-to-terminal voice communications if needed. ASCII or BAUDOT modes are available with normal input keying capability. The companion printer is a portable 85 column (or optional 136 column) serial, dot matrix line printer/plotter. It is a medium speed device that includes interface data, power supply, paper supply, and control mechanisms. It produces an alphanumeric printout at 50 to 240 characters per second depending on character font and number of characters per line selected.

Technical Characteristics

TERMINAL:


Data Transfer Rate	DACB rates: 2,400 to 32,000 b/s Non DACB rates: 75X2n to 9,600, 16,000, and 32,000 b/s BAUDOT rates: 45.5, 50, and 75
Access Time	10 msec
Primary Voltage Input	100/130 V AC, 48/63 HZ or 200/260 V AC, 48/63 HZ
Consumption	93W
Dissipation	15 W \pm 10%
Battery	Four 1.5-V NI-CAD, C-size
Height (Closed)	25 cm (10.0 in)
Height (Open)	43 cm (17.0 in)
Width	51 cm (20.0 in)
Depth	56 cm (22.0 in)
Weight	25 kg (55 lb)

**Technical Characteristics
(Cont.)**

PRINTER:

Speed	150/240 cps
Primary Voltage Input	100/130 V AC, 48/63 Hz or 200/260 V AC, 48/63 Hz
Consumption	13 W average
Height (Closed)	15 cm (6.0 in)
Height (Open)	19 cm (7.5 in)
Width	38 cm (15.0 in)
Depth	36 cm (14.0 in)
Weight	6 kg (13.2 lb) without paper

AN/UGC-144 Communications Terminal

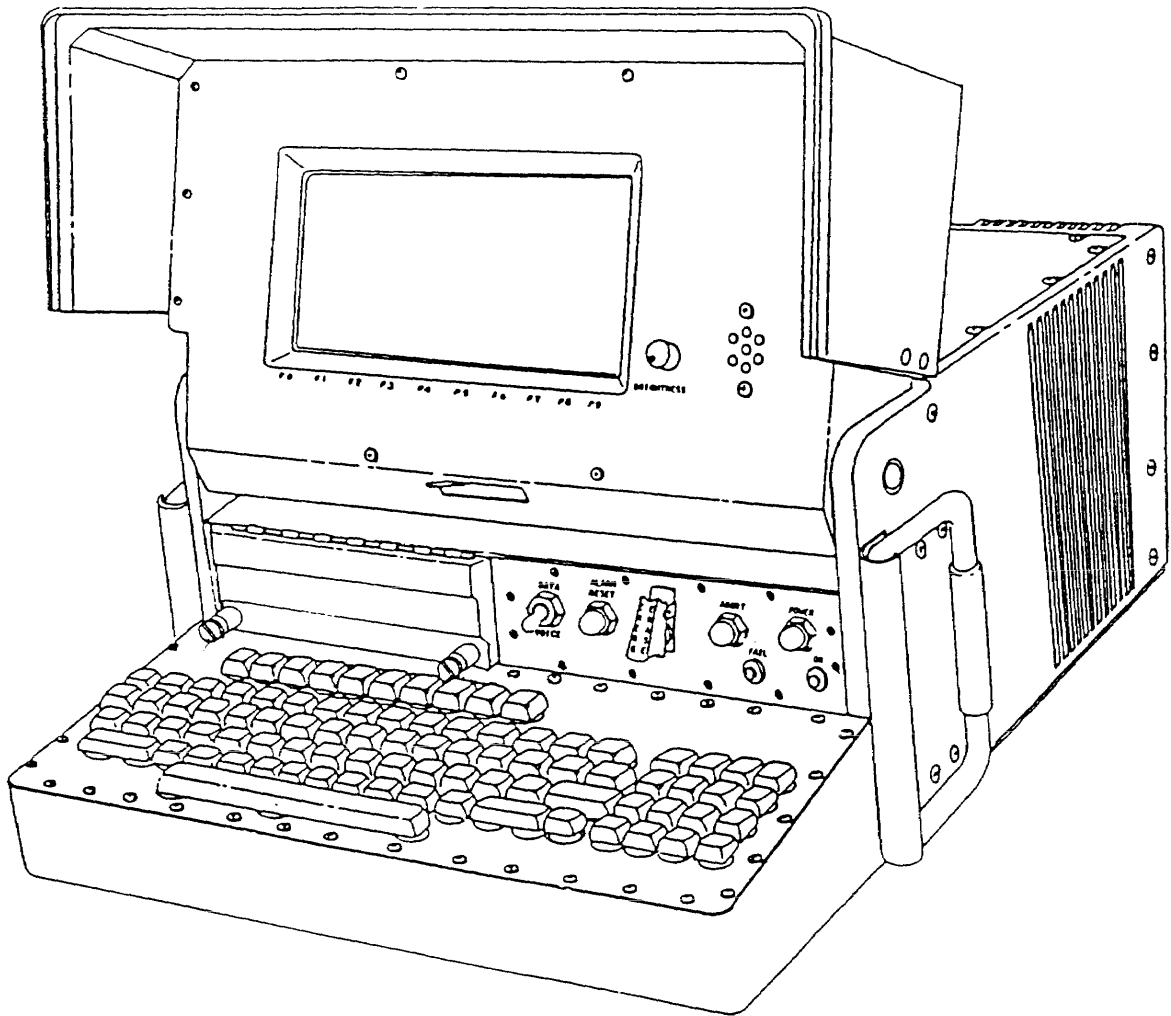

NOTE: Printer is separate.