



5899
PENTODE
 Five-Star Tube
 ★ ★ ★ ★ ★

FOR RF AND IF AMPLIFIER APPLICATIONS

SEMI-REMOTE-CUTOFF
8-LEAD SUBMINIATURE

SHOCK, VIBRATION RATINGS
HEATER-CYCLING RATING

DESCRIPTION AND RATING

The 5899 is a subminiature, semi-remote-cutoff pentode for use as a wide-band, high-frequency amplifier. Its semi-remote-cutoff characteristic makes it suitable for use in circuits to which it is desired to apply automatic-gain-control.

The 5899 is a special-quality tube for use in critical industrial and military applications in which operational dependability is of primary importance. Features of the tube include a high degree of mechanical strength and a heater-cathode construction capable of withstanding many-thousand cycles of intermittent operation. When used in on-off control applications, the tube will maintain its emission capabilities after long periods of operation under cutoff conditions.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Voltage, AC or DC..... $6.3 \pm 5\%$ Volts

Heater Current..... 0.15 Amperes

Direct Interelectrode Capacitances

With Shield* Without Shield

Grid-Number 1 to Plate, maximum.....	0.015	0.03 $\mu\mu\text{f}$
Input.....	4.2	4.0 $\mu\mu\text{f}$
Output.....	3.4	1.9 $\mu\mu\text{f}$

*With external shield of 0.405-inch inside diameter connected to cathode.


MECHANICAL

Mounting Position—Any

Envelope—T-3, Glass

Base—E8-10, Subminiature Button 8-Lead

BASING DIAGRAM




RETMA 8DL

TERMINAL CONNECTIONS

- Lead 1—Grid Number 1
- Lead 2—Cathode and Grid Number 3
- Lead 3—Heater
- Lead 4—Cathode and Grid Number 3
- Lead 5—Plate
- Lead 6—Heater
- Lead 7—Grid Number 2 (Screen)
- Lead 8—Cathode and Grid Number 3

PHYSICAL DIMENSIONS

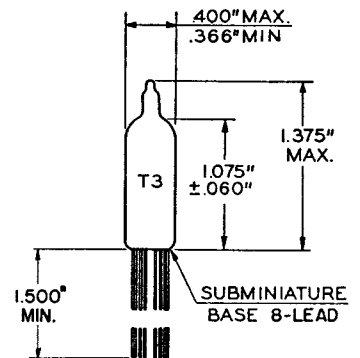

RETMA 3-1



MAXIMUM RATINGS

ABSOLUTE MAXIMUM VALUES

Plate Voltage	165 Volts
Screen Voltage	155 Volts
Negative DC Grid-Number 1 Voltage	55 Volts
Plate Dissipation	0.75 Watts
Screen Dissipation	0.35 Watts
DC Cathode Current	16.5 Milliampere
Heater-Cathode Voltage	
Heater Positive with Respect to Cathode	200 Volts
Heater Negative with Respect to Cathode	200 Volts
Bulb Temperature at Hottest Point	220 C

CHARACTERISTICS AND TYPICAL OPERATION

CLASS A₁ AMPLIFIER

Plate Voltage	100 Volts
Screen Voltage	100 Volts
Cathode-Bias Resistor	120 Ohms
Plate Resistance, approximate	0.26 Megohms
Transconductance	4500 Micromhos
Plate Current	7.2 Milliampere
Screen Current	2.0 Milliampere
Grid-Number 1 Voltage, approximate	
$G_m = 25$ Micromhos	-14 Volts

CHARACTERISTICS LIMITS

		Minimum	Maximum	
Heater Current				
$E_f = 6.3$ volts	Initial	140	160	Milliampere
	500-Hr	138	164	Milliampere
Plate Current				
$E_f = 6.3$ volts, $E_b = 100$ volts, $E_{c2} = 100$ volts, $R_k = 120$ ohms (by-passed) ..	Initial	5.2	9.2	Milliampere
Screen Current				
$E_f = 6.3$ volts, $E_b = 100$ volts, $E_{c2} = 100$ volts, $R_k = 120$ ohms (by-passed) ..	Initial	1.0	3.0	Milliampere
Transconductance (1)				
$E_f = 6.3$ volts, $E_b = 100$ volts, $E_{c2} = 100$ volts, $R_k = 120$ ohms (by-passed) ..	Initial	3800	5200	Micromhos
Transconductance Change with Heater Voltage				
Difference between Transconductance (1) and Transconductance at $E_f = 5.7$ volts (other conditions the same) expressed as a percentage of Transconductance (1)				
	Initial	10	Percent
	500-Hr	15	Percent
Transconductance Change with Operation				
Difference between Transconductance (1) initially and after operation expressed as a percentage of initial value				
	500-Hr	20	Percent
Average Transconductance Change with Operation				
Average of values for "Transconductance Change with Operation"				
	500-Hr	15	Percent
Plate Resistance				
$E_f = 6.3$ volts, $E_b = 100$ volts, $E_{c2} = 100$ volts, $R_k = 120$ ohms (by-passed) ..	Initial	0.175	Megohms
Transconductance Cutoff				
$E_f = 6.3$ volts, $E_b = 100$ volts, $E_{c2} = 100$ volts, $E_{c1} = -14$ volts	Initial	1.0	75	Micromhos

CHARACTERISTICS LIMITS (Cont'd)

		Minimum	Maximum	
Interelectrode Capacitances				
Grid-Number 1 to Plate (g1 to p).....	Initial	0.015	$\mu\mu\text{f}$
Input (g1 to h, k, g2, g3).....	Initial	3.8	4.8	$\mu\mu\text{f}$
Output (p to h, k, g2, g3).....	Initial	2.9	3.9	$\mu\mu\text{f}$
Measured with external shield of 0.405-inch diameter connected to cathode				
Negative Grid-Number 1 Current				
Ef = 6.3 volts, Eb = 100 volts, Ec2 = 100 volts, Rk = 120 ohms (by-passed), Rg1 = 1.0 meg				
	Initial	0.3	Microamperes
	500-Hr	0.8	Microamperes
Heater-Cathode Leakage Current				
Ef = 6.3 volts, Ehk = 100 volts				
Heater Positive with Respect to Cathode.....	Initial	5.0	Microamperes
	500-Hr	10	Microamperes
Heater Negative with Respect to Cathode.....	Initial	5.0	Microamperes
	500-Hr	10	Microamperes
Interelectrode Leakage Resistance				
Ef = 6.3 volts. Polarity of applied d-c interelectrode voltage is such that no cathode emission results.				
Grid-Number 1 to All at 100 Volts DC.....	Initial	100	Megohms
	500-Hr	50	Megohms
Plate to All at 300 Volts DC.....	Initial	100	Megohms
	500-Hr	50	Megohms
Vibrational Noise Output Voltage, RMS				
Ef = 6.3 volts, Ebb = 100 volts, Ec2 = 100 volts, Rk = 120 ohms (by-passed), RL = 10,000 ohms, Vibrational acceleration = 15 G at 40 cps				
	Initial	60	Millivolts
Grid-Number 1 Emission Current				
Ef = 7.5 volts, Eb = 100 volts, Ec2 = 100 volts, Ecc1 = -14 volts, Rg1 = 1.0 meg				
	Initial	0.5	Microamperes

The indicated 500-hour values are life-test end points for the following conditions of operation: Ef = 6.3 volts, Eb = 100 volts, Ec2 = 100 volts, Rk = 120 ohms, Rg1 = 1.0 meg, Ehk = 200 volts with heater positive with respect to cathode, and bulb temperature = 220 C minimum.

SPECIAL TESTS AND RATINGS

Stability Life Test

Statistical sample operated for one hour to evaluate and control initial variations in transconductance.

Survival Rate Life Test

Statistical sample operated for one hundred hours to evaluate and control early-life electrical and mechanical in-operatives.

Heater-Cycling Life Test

Statistical sample operated for 2000 cycles to evaluate and control heater-cathode defects. Conditions of test include $E_f = 7.0$ volts cycled for one minute on and four minutes off, $E_b = E_{c2} = E_{c1} = 0$ volts, and $E_{hk} = 140$ volts RMS.

Shock Rating—450 G

Statistical sample subjected to five impact accelerations of 450 G in each of four different positions. The accelerating forces are applied by the Navy-type, High Impact (flyweight) Shock Machine for Electronic Devices or its equivalent.

Fatigue Rating—2.5 G



Statistical sample subjected to vibrational acceleration of 2.5 G for 32 hours minimum in each of three different positions. The sinusoidal vibration is applied at a fixed frequency between 25 and 60 cycles per second.

Altitude Rating—60,000 Feet


Statistical sample subjected to pressure of 55 millimeters of mercury to evaluate and control arcing and corona.

Note: The conditions for some of the indicated tests have deliberately been selected to aggravate tube failures for test and evaluation purposes. In no sense should these conditions be interpreted as suitable circuit operating conditions.

In the design of military equipment employing this tube, reference should be made to the appropriate MIL-E-1 specification.

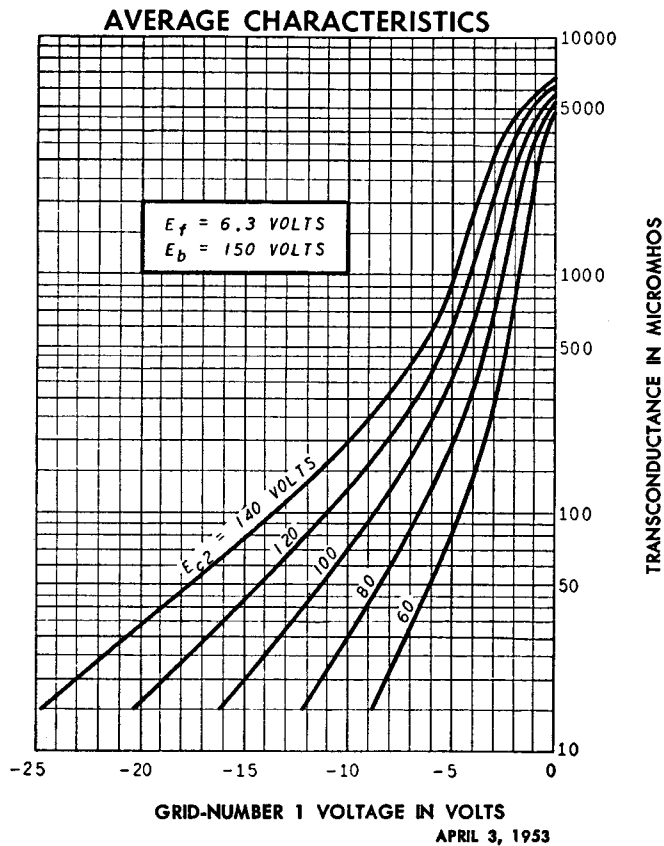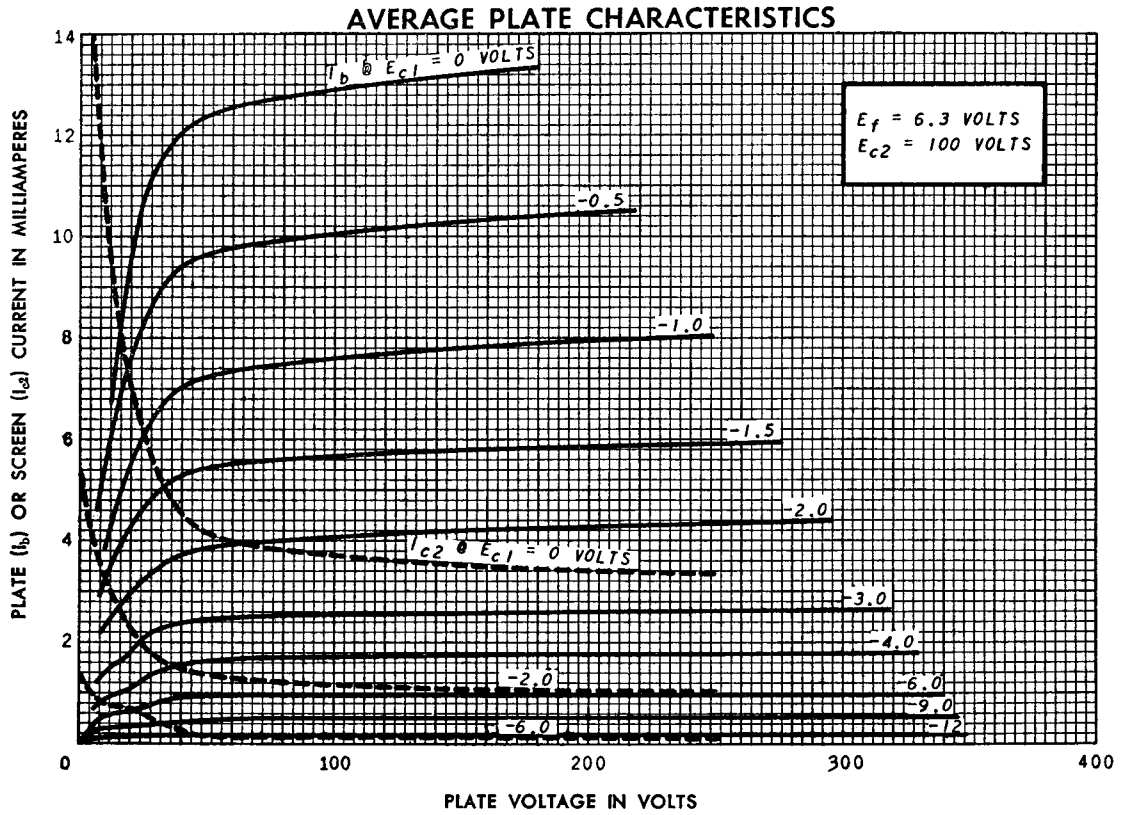


AVERAGE CHARACTERISTICS

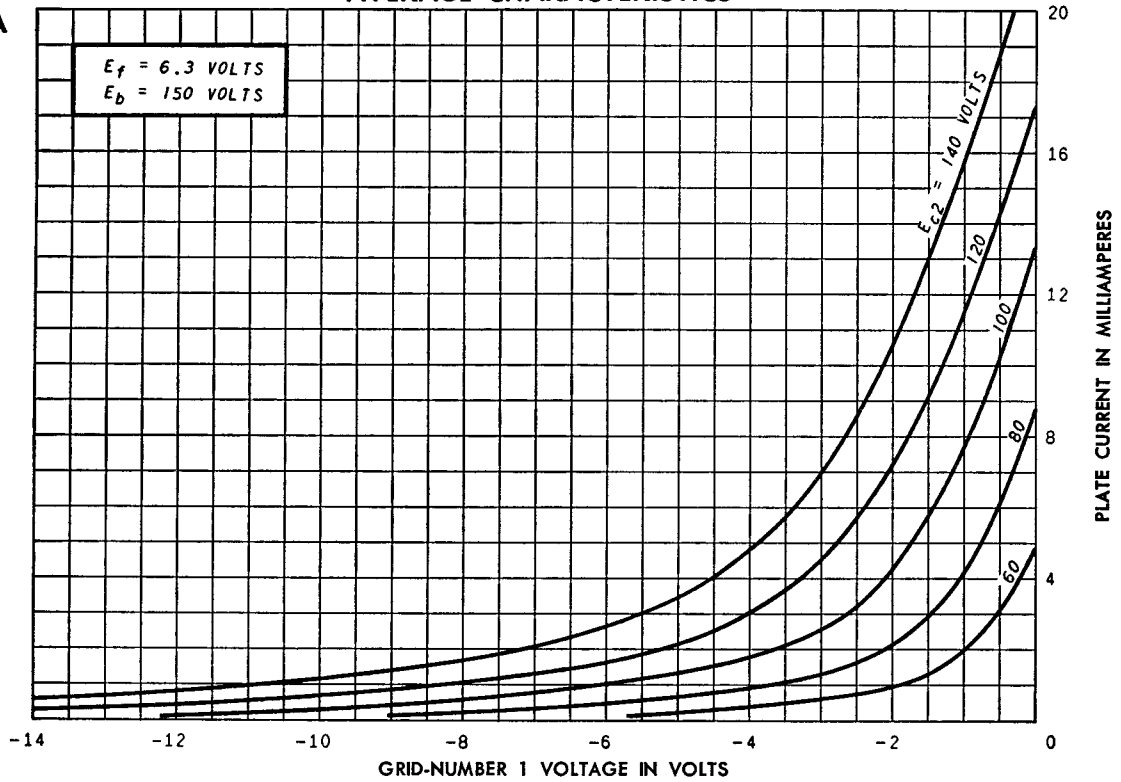

APRIL 3, 1953

AVERAGE CHARACTERISTICS

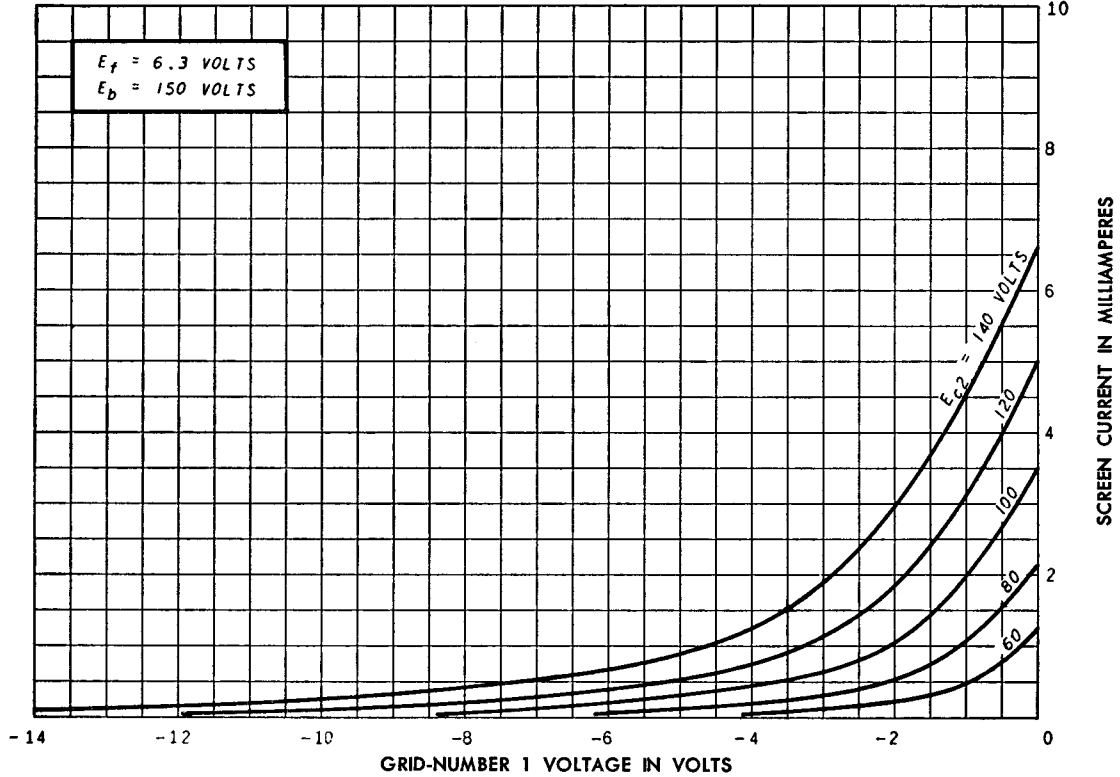

APRIL 3, 1953

ELECTRONIC COMPONENTS DIVISION



Schenectady 5, N. Y.