

## U.H.F. TRIODE

Triode intended for use as grounded grid U.H.F. amplifier for bands IV and V.

### QUICK REFERENCE DATA

Anode current	$I_a$	12.5 mA
Transconductance	$S$	13.5 mA/V
Amplification factor	$\mu$	65


**HEATING:** Indirect by A.C. or D.C.; series supply

Heater current	$I_f$	300 mA
Heater voltage	$V_f$	3.8 V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

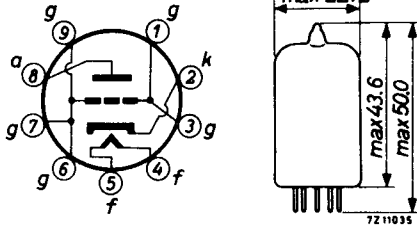

### CAPACITANCES

Without external screen

Anode to grid  $C_{ag}$  1.2 pF

With external screen (inside diameter 22.2 mm)

Anode to grid  $C_{ag}$  1.7 pF

Grid to anode + cathode  $C_{g/kf}$  3.8 pF

Anode to heater + cathode  $C_{a/kf}$  0.055 pF

**TYPICAL CHARACTERISTICS**

Anode voltage	$V_a$	160 V <sup>1)</sup>
Cathode resistor	$R_k$	100 $\Omega$ <sup>1)</sup>
Anode current	$I_a$	12.5 mA
Transconductance	$S$	13.5 mA/V
Amplification factor	$\mu$	65
Equivalent noise resistance	$R_{eq}$	240 $\Omega$
Noise figure at $f = 850$ MHz	$F$	10 dB
Anode voltage	$V_a$	0 V
Grid current, positive	$I_g$	0.3 $\mu$ A
Grid voltage	$-V_g$	max. 1.3 V

Series resonance frequencies

Measured between a point on the relevant tube pin close to the tube bottom and a point close to the relevant pin on a metal reference plane, placed against the tube bottom.

All the pins, except the relevant one, are connected to the reference plane with a negligible impedance.


The tube is screened by a metal screen with an inside diameter of 22.2 mm placed upon the metal reference plane.


Heater voltage	$V_f$	0 V
Anode voltage	$V_a$	0 V
Anode resonance frequency	$f_{0a}$	1700 MHz
Cathode resonance frequency	$f_{0k}$	1000 MHz

**LIMITING VALUES** (Design centre rating system)

Anode voltage	$V_{a0}$	max. 550 V
	$V_a$	max. 175 V
Anode dissipation	$W_a$	max. 2 W
Cathode current	$I_k$	max. 13 mA
Grid voltage	$-V_g$	max. 50 V
Grid resistor ( $R_k = 100 \Omega$ )	$R_g$	max. 1 M $\Omega$
Cathode to heater voltage	$V_{kf}$	max. 100 V <sup>1)</sup>

<sup>1)</sup> To fulfil the modulation hum requirements, the A.C. component should not exceed 50 V<sub>RMS</sub>.

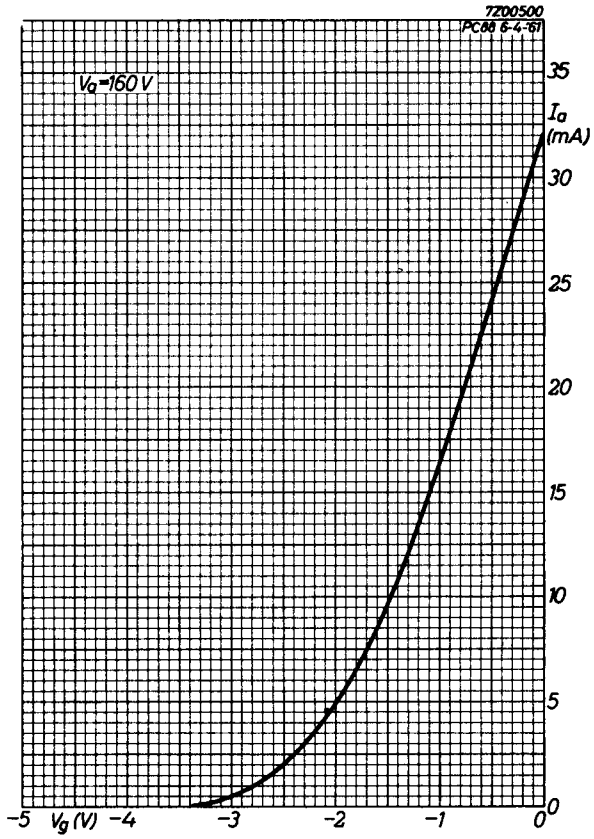

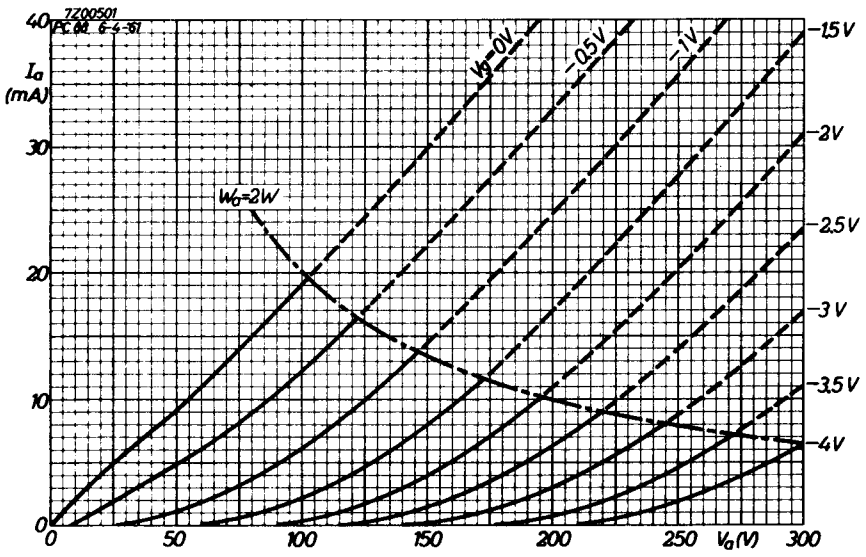

# PHILIPS

Data handbook



Electronic  
components  
and materials

## PC88

<b>page</b>	<b>sheet</b>	<b>date</b>
1	1	1969.12
2	2	1969.01
3	3	1969.01
4	4	1969.01
5	FP	1999.07.30