

**RCA-26**  
**AMPLIFIER**  
**A-C FILAMENT**

Filament	Coated	
Voltage	1.5	a-c or d-c volts
Current	1.05	amp.
<b>Direct Interelectrode Capacitances:</b>		
Grid to Plate	8.1	$\mu\text{f}$
Grid to Filament	2.8	$\mu\text{f}$
Plate to Filament	2.5	$\mu\text{f}$
Maximum Overall Length		4-11/16"
Maximum Diameter		1-13/16"
Bulb	(2)    (3)	ST-14
Base		Medium 4-Pin
Pin 1-Filament	(1)    (4)	Pin 3-Grid
Pin 2-Plate		Pin 4-Filament


BOTTOM VIEW

AMPLIFIER (Class A)


**Operating Conditions and Characteristics:**

Filament	1.5	1.5	1.5	a-c volts
Plate	90	135	180	max. volts
Grid*	-7	-10	-14.5	volts
Amp. Fact.	8.3	8.3	8.3	
Plate Res.	8900	7600	7300	ohms
Mut. Cond.	935	1400	1150	$\mu\text{mhos}$
Plate Cur.	2.9	5.5	6.2	ma.

\* Grid volts measured from mid-point of a-c operated filament.

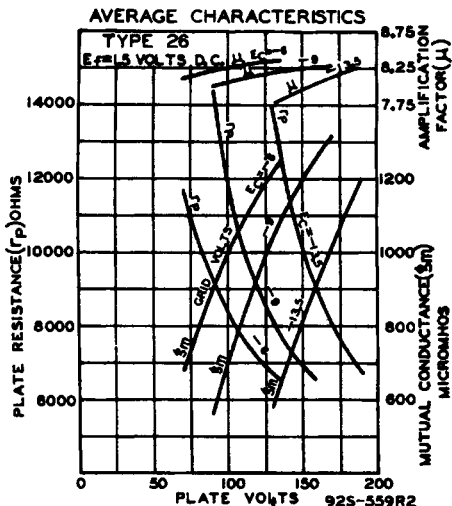

## AVERAGE PLATE CHARACTERISTICS

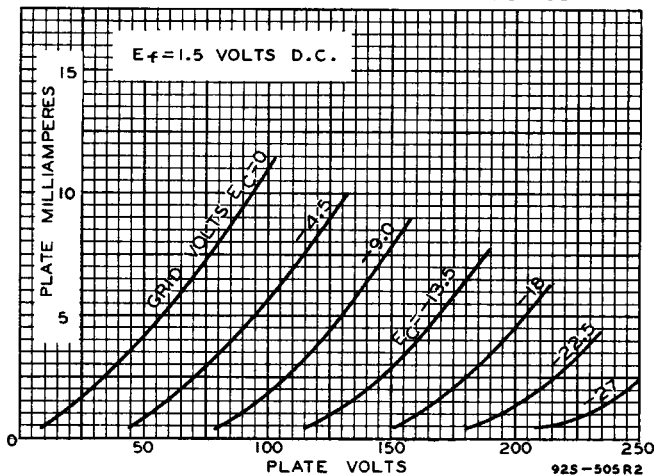

## AVERAGE CHARACTERISTICS

