



6FH8

6FH8

MEDIUM-MU TRIODE— THREE-PLATE TETRODE

9-PIN MINIATURE TYPE

For harmonic-generator applications

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	6.3 ± 10%	volts
Current	0.45	amp

Direct Interelectrode Capacitances:⁰

Triode Unit:

Grid to plate	1.4	μf
Grid to cathode & heater.	2.6	μf
Plate to cathode & heater	1	μf

Tetrode Unit:

Grid No.1 to plate No.1	0.06 max.	μf
Grid No.1 to cathode & heater, plate No.3, plate No.2, and grid No.2	4.5	μf
Plate No.1 to cathode & heater, plate No.3, plate No.2, and grid No.2	1.4	μf
Tetrode grid No.1 to triode plate . . .	0.35 max.	μf
Tetrode plate No.1 to triode plate. . .	0.008 max.	μf

Characteristics, Class A₁ Amplifier:

Triode Unit

Plate Voltage	100	volts
Grid Voltage.	-1	volt
Amplification Factor.	40	
Plate Resistance (Approx.).	7400	ohms
Transconductance.	5400	μhos
Plate Current	7.9	ma
Grid Voltage (Approx.) for plate μa = 100.	-7	volts

Tetrode Unit with plates No.2 and No.3 connected to cathode

Plate-No.1 Voltage.	250	volts
Grid-No.2 Voltage	250	volts
Grid-No.1 Voltage	-2	volts
Plate-No.1 Resistance (Approx.)	0.75	megohm
Transconductance, Grid No.1 to Plate No.1	4400	μhos
Plate-No.1 Current.	7.3	ma
Grid-No.2 Current	1.4	ma
Grid-No.1 Voltage (Approx.) for plate-No.1 μa = 100	-7	volts

⁰ With external shield JEDEC No.315 connected to cathode.




6FH8

MEDIUM-MU TRIODE— THREE-PLATE TETRODE

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-3/16"
Maximum Seated Length.	1-15/16"
Length, Base Seat to Bulb Top (Excluding tip).	1-9/16" ± 3/32"
Diameter.	0.750" to 0.875"
Dimensional Outline.	See General Section
Bulb.	T6-1/2
Base.	Small-Button Noval 9-Pin (JEDEC No. E9-1)
Basing Designation for BOTTOM VIEW.	9KP

Pin 1 - Tetrode
Plate No. 3
Pin 2 - Triode Grid
Pin 3 - Triode Plate
Pin 4 - Heater,
Cathode
Pin 5 - Heater



Pin 6 - Tetrode
Grid No. 1
Pin 7 - Tetrode
Grid No. 2
Pin 8 - Tetrode
Plate No. 2
Pin 9 - Tetrode
Plate No. 1

HARMONIC-GENERATOR SERVICE

Maximum Ratings, Design-Maximum Values:

	Triode Unit	Tetrode Unit	
PLATE VOLTAGE.	275 max.	-	volts
PLATE-No. 1 VOLTAGE.	-	275 max.	volts
PLATE-No. 2 VOLTAGE.	-	200 max.	volts
PLATE-No. 3 VOLTAGE.	-	200 max.	volts
GRID-No. 2 (SCREEN-GRID) SUPPLY VOLTAGE.	-	275 max.	volts
GRID-No. 2 VOLTAGE.	-	See Grid-No. 2 Input	

Rating Chart at front of Receiving Tube Section

GRID-No. 1 (CONTROL- GRID) VOLTAGE:			
Negative-bias value. . .	40 max.	40 max.	volts
Positive-bias value. . .	0 max.	0 max.	volts
GRID-No. 2 INPUT:			
For grid-No. 2 voltages up to 137.5 volts. . .	-	0.45 max.	watt
For grid-No. 2 voltages between 137.5 and 275 volts.	-	See Grid-No. 2 Input	

Rating Chart at front of Receiving Tube Section

PLATE DISSIPATION.	1.7 max.	-	watts
PLATE-No. 1 DISSIPATION. . .	-	2.3 max.	watts
PLATE-No. 2 DISSIPATION. . .	-	0.3 max.	watt
PLATE-No. 3 DISSIPATION. . .	-	0.3 max.	watt



6FH8

6FH8

MEDIUM-MU TRIODE— THREE-PLATE TETRODE

Typical Operation:

Tetrode Unit with separate plate operation

Plates—No.1, No.2, and No.3 Voltage	100	volts
Grid—No.2 Voltage	50	volts
Grid—No.1 Voltage	-1	volt
Plate—No.1 Current	1.6	ma
Plate—No.2 Current	0.04	ma
Plate—No.3 Current	0.04	ma
Grid—No.2 Current	0.3	ma
Transconductance (Approx.):		
Grid No.1 to plate No.1	2500	μ mhos
Grid No.1 to plate No.2	70	μ mhos
Grid No.1 to plate No.3	70	μ mhos

Maximum Circuit Values:


	<i>Triode Unit</i>	<i>Tetrode Unit</i>	
Grid—No.1—Circuit Resistance:			
For fixed-bias operation	0.5 max.	0.5 max.	megohm

6FH8



6FH8

AVERAGE CHARACTERISTICS TRIODE UNIT

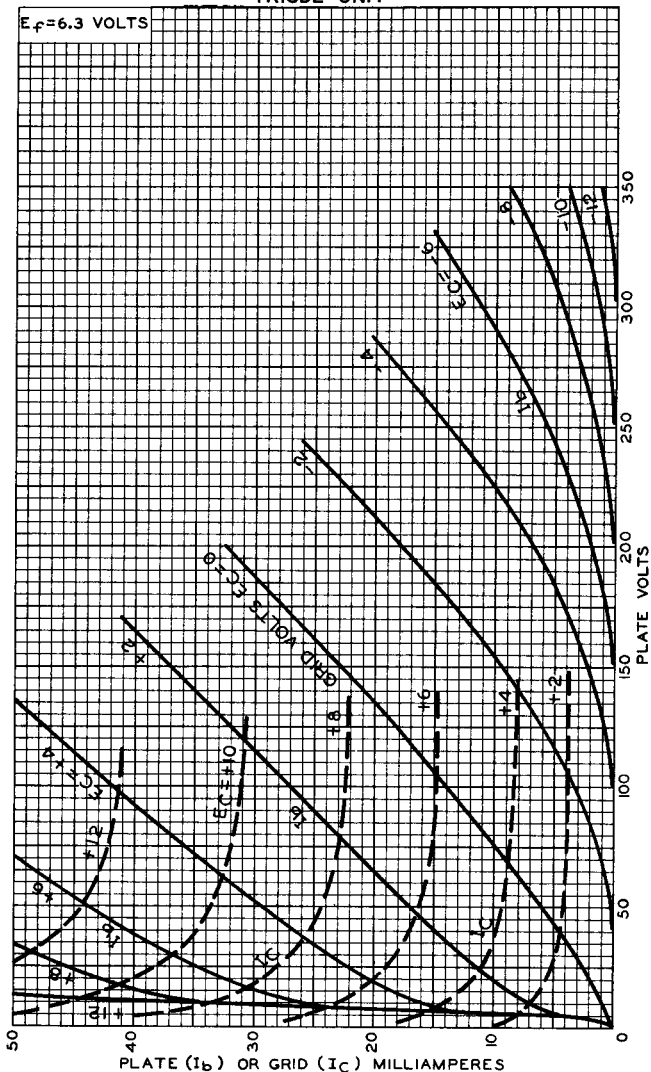 $E_f = 6.3$ VOLTS

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-10220



6FH8

AVERAGE CHARACTERISTICS TETRODE UNIT

6FH8

$E_f = 6.3$ VOLTS
PLATES NO 2 AND NO 3 CONN-
ECTED TO CATHODE.
GRID-NO 2 VOLTS = 150

