

Beam Power Tube

**7-PIN MINIATURE TYPE
CONTROLLED CATHODE WARM-UP TIME MINIMIZES
EXTRANEIOUS SOUND DURING RECEIVER WARM UP.**

For Use in the Audio Output Stages of Television Receivers

Electrical:

Heater Characteristics and Ratings:

Voltage (AC or DC)	6.3 ± 0.6 volts	
Current at heater volts = 6.3	0.450	amp
Peak heater-cathode voltage:		
Heater negative with respect to cathode	200	max. volts
Heater positive with respect to cathode	200 ^a	max. volts

Minimum Cathode Warm-up Time:^b

Heater volts = 6.3, plate and grid-No.2 volts = 250, and cathode resistor (ohms) = 680	14	sec
--	----	-----


Direct Interelectrode Capacitances (Approx.):

G1 to P	0.4	pf
Input: G1 to (K+G3, G2, H)	8.0	pf
Output: P to (K+G3, G2, H)	8.5	pf

Mechanical:

Operating Position	Any
Type of Cathode	Coated Unipotential
Maximum Overall Length	2-5/8"
Maximum Seated Length	2-3/8"
Length, Base Seat to Bulb Top (Excluding Tip)	2" ± 3/32"
Diameter	0.650" to 0.750"
Dimensional Outline	See <i>General Section</i>
Bulb	T5-1/2
Base	Small-Button Miniature 7-Pin (JEDEC No. E7-1)
Basing Designation for BOTTOM VIEW	7BZ

Pin 1 - Grid No. 1
Pin 2 - Cathode,
 Grid No. 3
Pin 3 - Heater



Pin 4 - Heater
Pin 5 - Plate
Pin 6 - Grid No. 2
Pin 7 - Grid No. 1

AMPLIFIER - Class A₁

Maximum Ratings, Design-Maximum Values:

Plate Voltage	275 max.	volts
Grid-No.2 (Screen-Grid) Voltage	275 max.	volts
Grid-No.2 Input	2 max.	watts



6HG5

Plate Dissipation.	12 max.	watts
Bulb Temperature (At hottest point on bulb surface).	250 max.	°C

Typical Operation and Characteristics:

Plate Voltage.	180	250	volts
Grid-No.2 Voltage.	180	250	volts
Grid-No.1 (Control-Grid) Voltage	-8.5	-12.5	volts
Peak AF Grid-No.1 Voltage.	8.5	12.5	volts
Zero-Signal Plate Current.	29	45	ma
Max.-Signal Plate Current.	30	47	ma
Zero-Signal Grid-No.2 Current.	3	4.5	ma
Max.-Signal Grid-No.2 Current.	4	7	ma
Plate Resistance (Approx.)	58000	52000	ohms
Transconductance	3700	4100	μmhos
Load Resistance.	5500	5000	ohms
Total Harmonic Distortion.	8	8	%
Max.-Signal Power Output	2	4.5	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:


For fixed-bias operation	0.1 max.	megohm
For cathode-bias operation	0.5 max.	megohm

^a The dc component must not exceed 100 volts.

^b The time interval between the instant all electrode voltages are applied and the instant a current of one milliamperes flows in the plate circuit of the 6HG5.



AVERAGE CHARACTERISTICS

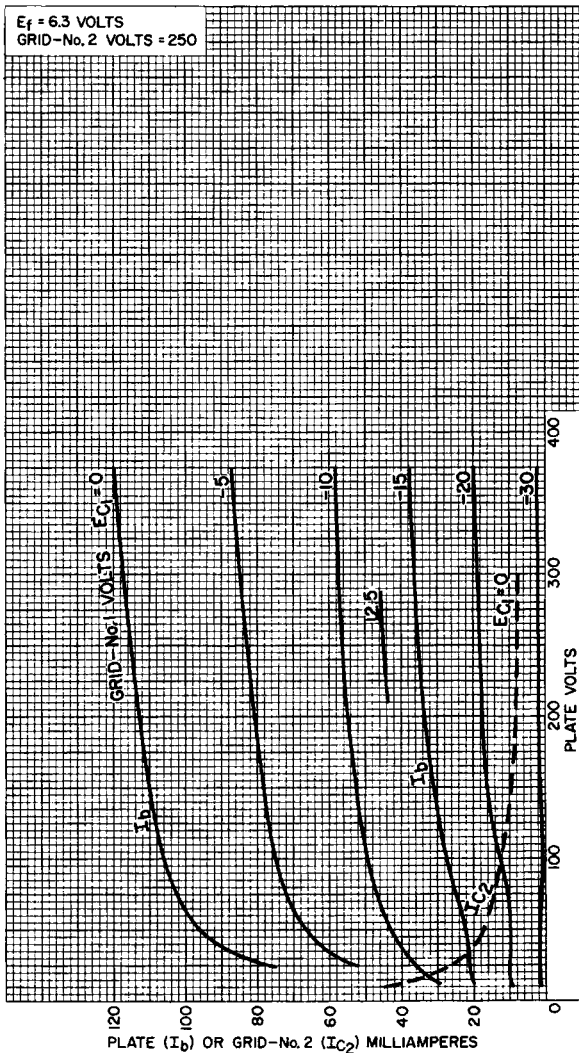


92CM-12368



6HG5

OPERATION CHARACTERISTICS

$E_f = 6.3$ VOLTS PLATE VOLTS = 250 GRID-NO.2 VOLTS = 250
GRID-NO.1 VOLTS = -12.5 SIGNAL VOLTS (RMS) = 8.8

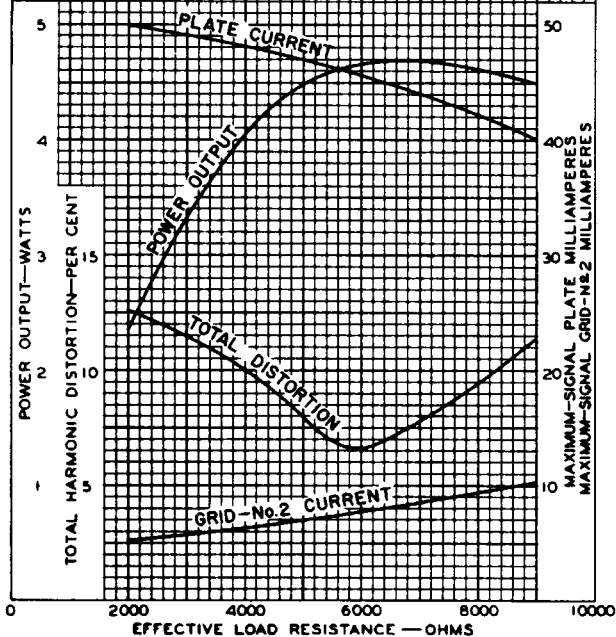

92CM-6339R2

