

## Medium-Mu Triode— Sharp-Cutoff Pentode

### 9-PIN MINIATURE TYPE

For Use in Low-B+ Black-and-White TV Receivers  
Having Low-Voltage Power Supplies

### ELECTRICAL CHARACTERISTICS

#### Bogey Values<sup>a</sup>

Heater Voltage (AC or DC) . . . . .	E <sub>h</sub>	6.3	V
Heater Current. . . . .	I <sub>h</sub>	0.775	A
<b>Direct Interelectrode Capacitances</b>			
Without external shield			
<i>Triode Unit:</i>			
Grid to plate . . . . .	c <sub>g-p</sub>	2.8	pF
Input: G <sub>T</sub> to (K <sub>T</sub> , K <sub>p</sub> +G <sub>3p</sub> +I <sub>S</sub> , H) . . . . .	c <sub>i</sub>	4.2	pF
Output: P <sub>T</sub> to (K <sub>T</sub> , K <sub>p</sub> +G <sub>3p</sub> +I <sub>S</sub> , H) . . . . .	c <sub>o</sub>	2.4	pF
<i>Pentode Unit:</i>			
Grid No.1 to plate. . . . .	c <sub>g1-p</sub>	0.12 max	pF
Input: G <sub>1p</sub> to (K <sub>p</sub> +G <sub>3p</sub> +I <sub>S</sub> , G <sub>2p</sub> , H) . . . . .	c <sub>i</sub>	14	pF
Output: P <sub>p</sub> to (K <sub>p</sub> +G <sub>3p</sub> +I <sub>S</sub> , G <sub>2p</sub> , H) . . . . .	c <sub>o</sub>	4.8	pF
Triode grid to pentode plate. . . . .	-	0.015 max	pF
Pentode plate to triode plate . . . . .	-	0.17 max	pF

For the following characteristics, see **Conditions**

		Triode Unit	Pentode Unit	
Amplification Factor. . . . .	$\mu$	46	-	-
Plate Resistance (Approx.). . . . .	r <sub>p</sub>	4400	55000	75000 $\Omega$
Transconductance. . . . .	g <sub>m</sub>	10400	21000	23000 $\mu\text{mho}$
DC Plate Current. . . . .	I <sub>b</sub>	15	16.5	20 mA
DC Grid-No.2 Current. . . . .	I <sub>c2</sub>	-	3.1	3.5 mA
Cutoff DC Grid-No.1 Voltage . . . . .	E <sub>c1</sub> (c <sub>o</sub> )	-6	-4.2	-4.2 V

Plate  $\mu\text{A} = 100$

#### Conditions

Heater Voltage. . . . .	E <sub>h</sub>	Bogey value			V
DC Plate Supply Voltage . . . . .	E <sub>bb</sub>	125	125	200	V
DC Grid-No.2 Supply Voltage . . . . .	E <sub>cc2</sub>	-	125	125	V
Grid No.1 . . . . .	-	Connected to negative end of R <sub>k</sub>			
Cathode Resistor. . . . .	R <sub>k</sub>	68	82	68	$\Omega$


### MECHANICAL CHARACTERISTICS

Operating Position. . . . .	Any
Type of Cathodes. . . . .	Coated Unipotential
Maximum Overall Length. . . . .	2.625 in
Maximum Seated Length . . . . .	2.375 in
Maximum Diameter. . . . .	0.875 in
Dimensional Outline . . . . .	See <i>General Section</i>
Envelope. . . . .	JEDEC T6-1/2
Base. . . . .	Small-Button Noval 9-Pin (JEDEC E9-1)



## TERMINAL DIAGRAM (Bottom View)

- Pin 1 - Triode Cathode
- Pin 2 - Triode Grid
- Pin 3 - Triode Plate
- Pin 4 - Heater
- Pin 5 - Heater
- Pin 6 - Pentode Grid No. 3,  
Pentode Cathode,  
Internal Shield
- Pin 7 - Pentode Grid No. 1
- Pin 8 - Pentode Grid No. 2
- Pin 9 - Pentode Plate



## DESIGN-MAXIMUM RATINGS

For operation as a Class A<sub>1</sub> Amplifier Tube

		Triode Unit	Pentode Unit	
DC Plate Voltage . . . . .	$E_b$	300	300	V
DC Grid-No.2 (Screen-Grid) Supply Voltage . . . . .	$E_{cc2}$	-	300	V
DC Grid-No.2 Voltage . . . . .	$E_{c2}$	-	See Grid-No.2 Input Rating Chart	
at front of Receiving Tube Section				
DC Grid-No.1 (Control-Grid) Voltage				
Positive-bias value . . . . .	$E_{c1}$	0	0	V
Heater-Cathode Voltage				
Peak . . . . .	$e_{hkm}$	±200		V
Average <sup>b</sup> . . . . .	$E_{hk(av)}$	100		V
Heater Voltage (AC or DC) . . . . .	$E_h$	5.7 to 6.9		V
Grid-No.2 Input	$P_{g2}$			
For $E_{c2} \leq 150$ V . . . . .	-	-	1	W
For $E_{c2} \geq 150$ V and $\leq 300$ V . . . . .	-	See Grid-No.2 Input Rating Chart		
at front of Receiving Tube Section				
Plate Dissipation . . . . .	$P_b$	2	5	W

## MAXIMUM CIRCUIT VALUES

		Triode Unit	Pentode Unit	
Grid-No.1 Circuit Resistance	$R_{g1(ckt)}$			
For fixed-bias operation. . . . .	-	0.5	0.1	MΩ
For cathode-bias operation. . . . .	-	1	0.25	MΩ


<sup>a</sup> Unless otherwise specified.

<sup>b</sup> Measured with a dc meter.



# Typical Characteristics

Triode Unit

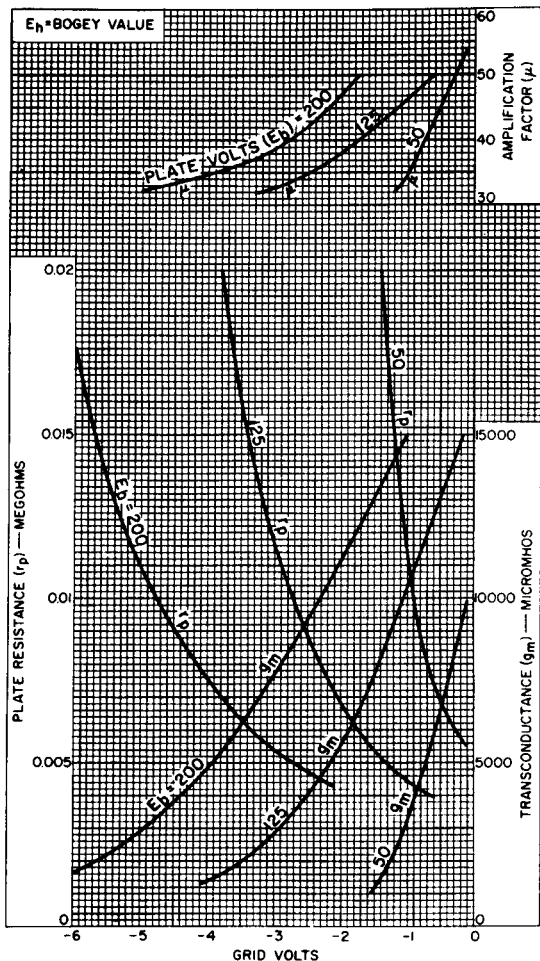


92CM-12623R1



# Typical Plate Characteristics

Triode Unit

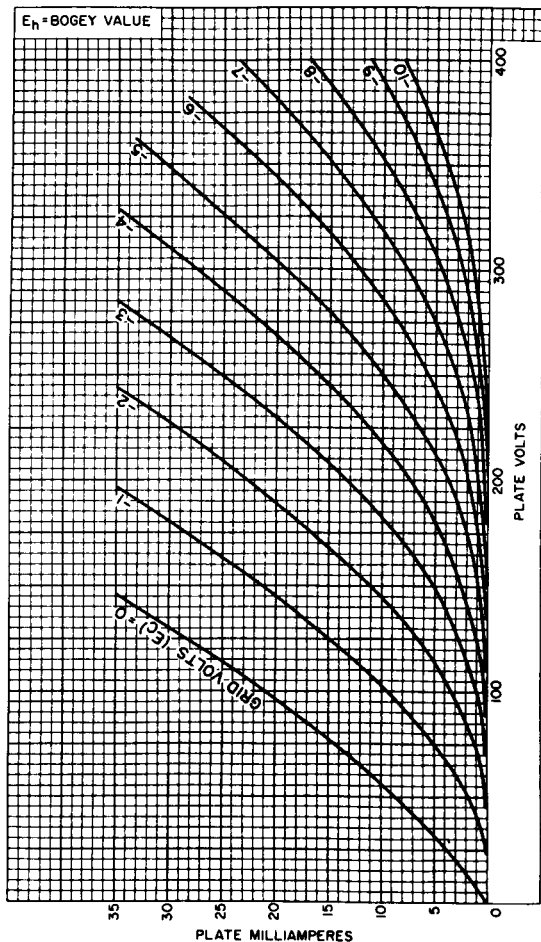


92CM-12616R1




# Typical Characteristics

Pentode Unit

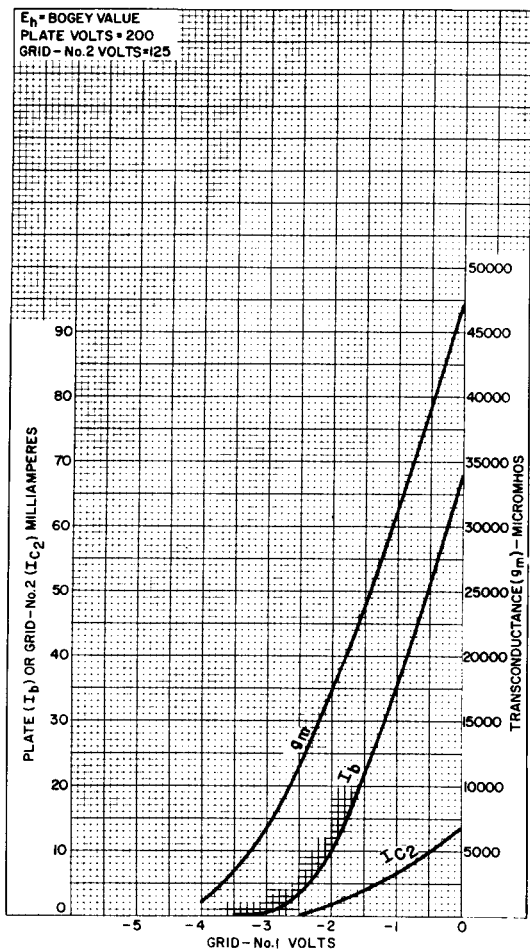

# Typical Plate Characteristics

Pentode Unit

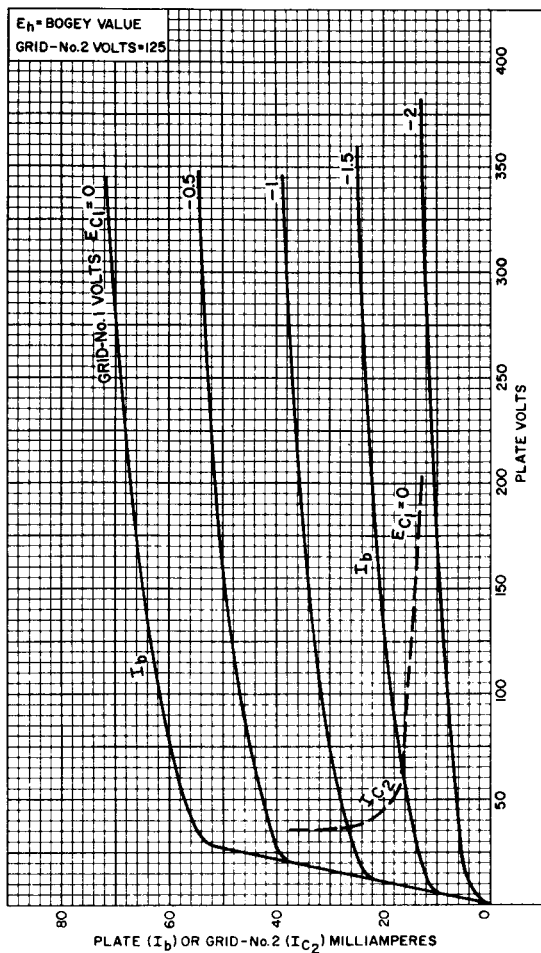

92CM-13751

